AVAILABLE OPTIONS FOR TANKS:


- PLASTIC PIPE SEALS OR BOOTS PROVIDED AT PIPE OPENINGS.
- EFFLUENT FILTERS CAN BE PROVIDED AS REQUIRED, BUT INSTALLED BY OTHERS.
- 3. CAST IN PVC RISERS WITH COVERS WITH SAFETY GRATES IF REQUIRED.
- 24" DIA., 36" DIA. & 48" DIA. PRECAST CONCRETE RISERS AND ADJUSTING RINGS.
- SQUARE AND RECTANGULAR PRECAST CONCRETE RISERS.
- 6. CAST IRON FRAMES & COVERS
- 7. ALUMINUM HATCHES
- 8. CUSTOM PIPE OPENING AND ACCESS OPENING SIZES & LOCATIONS.
- CUSTOM INTERIOR PRECAST WALLS.
- 10. POLYPROPYLENE COATED STEEL STEPS.
- 11. COAL TAR EPOXY INTERIOR COATED.
- 12. BITUMINOUS TAR EXTERIOR COATED.

SEPTIC TANK NOTES:

- 1. ALL TANK DIMENSIONS ARE IN INCHES.
- 2. ACCESS OPENINGS PROVIDED PER PLAN. DETAIL SHOWS STANDARD OPENINGS.
- TANK JOINT SEALED WITH BUTYL SEAL ASTM C-990-91.
- TANKS ARE ASTM C-1227.
- 5. GRADE 65 WIRE.
- GRADE 60 REBAR. 6.
- OUTLET SIPHON PROVIDED, BUT INSTALLED BY CONTRACTOR. SIPHONES FOR GREASE AND OIL SEPERATORS ARE PROVIDED BY **OTHERS**

WEIGHT:

TOP - 4,497 LBS. BOTTOM - 4,497 LBS. TOTAL - 8,995 LBS.

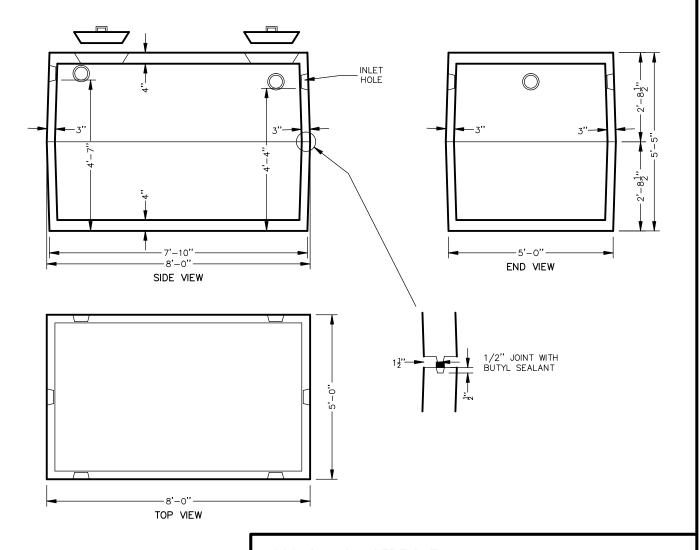





FILE NO.: 151122E

05/02/2015 DATE:

PG# 38 0: 616.453.9429

F: 616.453.7580 2500 3 MILE ROAD NW GRAND RAPIDS, MI 49534-1314 www.grandvalleyconcrete.com